


Solutions for Biogas Utilization

Problem: Low BTU gas from anaerobic lagoons or digesters is flared because the BTU value is too low or the flow is too low to justify burner modifications. Additionally, supplemental fuel is often required to run the flare.


Low BTU
Biogas

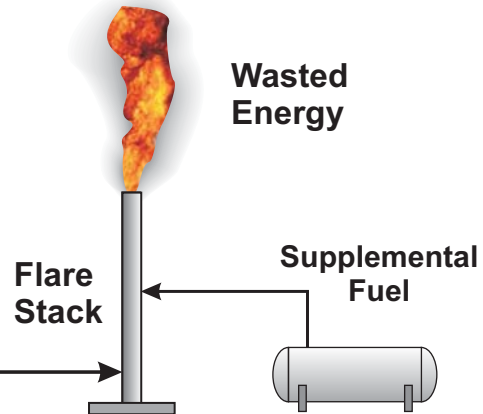

Solution: Capture Biogas BTUs by blending with propane or LPG to make Synthetic Natural Gas (SNG)

Biogas Blended SNG has the Same Combustion Properties as Natural Gas:

- No burner modifications required
- Can be mixed with Natural Gas
- Offsets Natural Gas purchases
- Provides emergency backup to Natural Gas
- Provides peak demand reduction
- Lower cost than Natural Gas

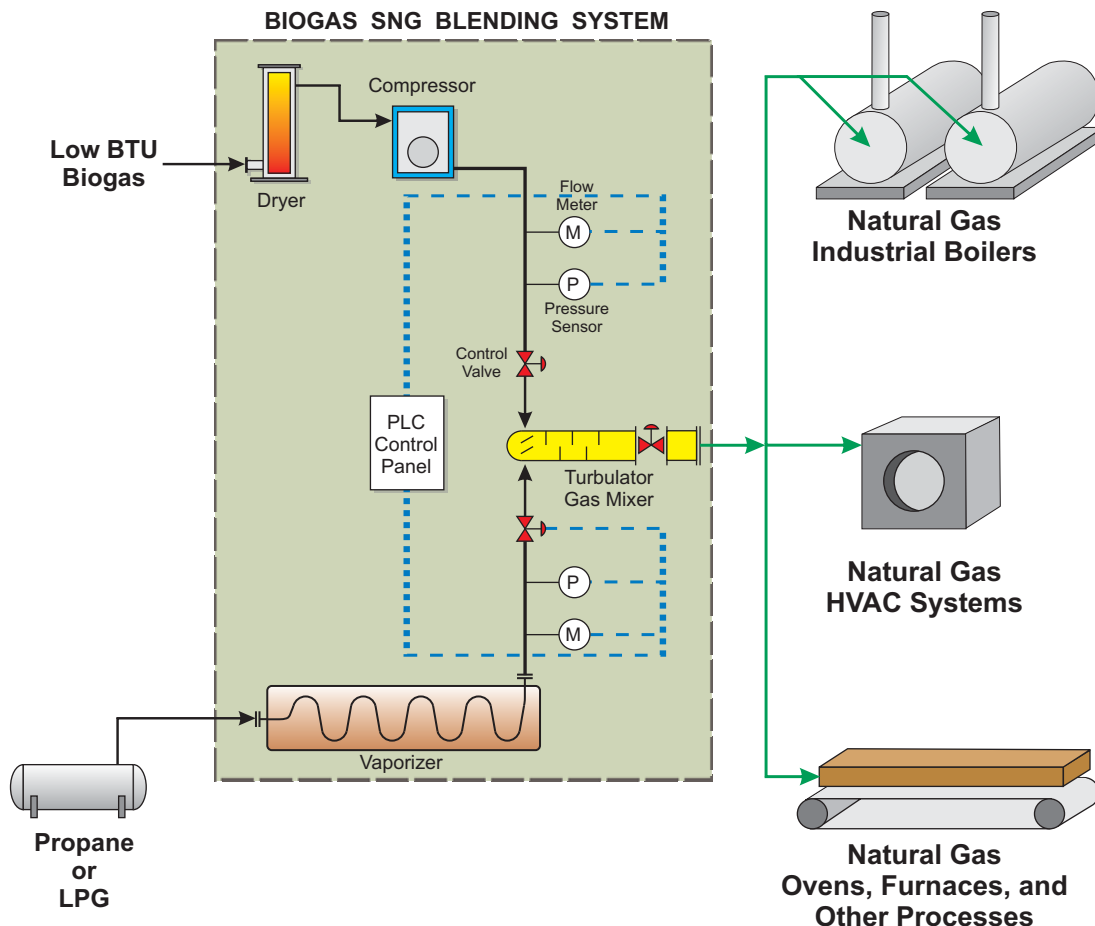

For more information call us at (877) 637-9470
or visit us at www.hardhatinc.com or www.elyenergy.com



HARD HAT SERVICES™
Engineering, Construction and Management Solutions

